



P&Z ELECTRONICS CO.,LTD




PZ-RM6 transformer

Web:<http://www.dgpinzhan.com>

E-mail:sales@dgpinzhan.com

Part Code	Date	Production	Type	Version	Page
PZ-RM6-701M	2013/3/6	Tom	DIP	A001	1

1. Dimensions: [mm]

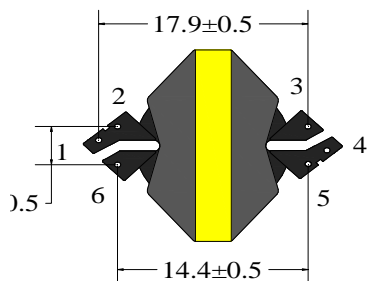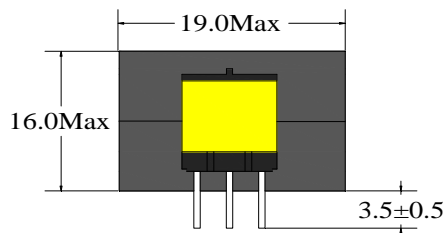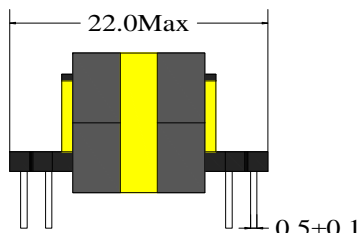

4. General Properties:

It is recommended that the temperature of the component does not exceed +125°C under worst case conditions.

Storage Temperature: -20 °C up to +60 °C

Operating Temperature: -40 °C up to +125 °C


Temperature Rise < 55K.

Test conditions of Electrical Properties: +20°C, 33% RH if not specified differently.

5. Electrical Properties:

Properties	Test conditions	Value	Unit	Tolerance
Inductance: 3-2	1KHZ/0.25V	700	uH	Min
Turns ratio:	N2:N1	1:1		±1%
Turns ratio:	N3:N1	1:1		±1%
Hi-pot: Pri-Sec	AC1000V/5mA/3S		V/(AC)	Pass
Hi-pot: Pri/Sec-Core	AC500V/5mA/3S		V/(AC)	Pass

2. Schematic:

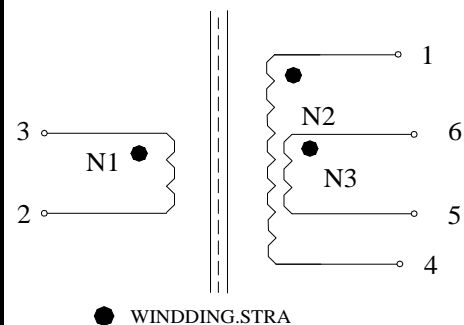

3. Winding construction:

